

# BOLD TERN

HLD IDENTIFICATION  
**BOLD TERN**

VESSEL SIDE IDENTIFICATION  
**BOLD TERN**

IMO 9583794

FRED. OLSEN WINDCARRIER OPERATIONS AS

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION  
ON REQUEST

LIGHTING & DIMMING  
ON REQUEST

HELIDECK HEIGHT  
VARIABLE

D-VALUE  
22,20 m

MTOW  
12,6 t

HELIDECK POSITION ON VESSEL  
BOW

HIGHEST OBSTACLE ON VESSEL  
CRANE (MAX. 460ft ABOVE HLD))

REFUELLING FACILITY  
NO

GROUND POWER UNIT  
NO

LANDING NET  
NO

TD/PM LIGHTING  
YES

HELIPORT IDENT LIGHTING  
YES

STATUS LIGHT  
YES

FIRE FIGHTING FACILITIES

**3 MONITORS**  
MANUAL ACTIVATION

**3 HYDRANTS**  
3x FLEXIBLE HOSES

**CO<sub>2</sub>**  
2x 30 kg

**DRY POWDER**  
2x 50 kg



# BOLD TERN

 HLD IDENTIFICATION  
**BOLD TERN**

 VESSEL SIDE IDENTIFICATION  
**BOLD TERN**

IMO 9583794

FRED. OLSEN WINDCARRIER OPERATIONS AS

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

 WEATHER INFORMATION  
 ON REQUEST

 LIGHTING & DIMMING  
 ON REQUEST

 HELIDECK HEIGHT  
 VARIABLE

 D-VALUE  
 22,20 m

 MTOW  
 12,6 t

 HELIDECK POSITION ON VESSEL  
 BOW

 HIGHEST OBSTACLE ON VESSEL  
 CRANE (MAX. 460ft ABOVE HLD))

 REFUELLING FACILITY  
 NO

 GROUND POWER UNIT  
 NO

 LANDING NET  
 NO

 TD/PM LIGHTING  
 YES

 HELIPORT IDENT LIGHTING  
 YES

 STATUS LIGHT  
 YES

FIRE FIGHTING FACILITIES

 3 MONITORS  
 MANUAL ACTIVATION

 3 HYDRANTS  
 3x FLEXIBLE HOSES

 CO<sub>2</sub>  
 2x 30 kg

 DRY POWDER  
 2x 50 kg

NON – COMPLIANCES

- NONE

LIMITATIONS

- CRANE BOOM MUST BE OUT OF REST POSITION FOR ALL HELICOPTER OPERATIONS TO ENSURE LOS CLEARANCE

REMARKS

- CONTACT BRIDGE / HLO FOR CLEARANCES, REQUESTS AND INFORMATION
- HELIDECK ORIENTATION TO BE TAKEN FROM HLD STATUS REPORT
- HELIDECK HEIGHT TO BE CHECKED FOR EACH LOCATION
- OVERFLIGHT OF VESSEL PROHIBITED

# BOLD TERN

HLD IDENTIFICATION  
**BOLD TERN**

VESSEL SIDE IDENTIFICATION  
**BOLD TERN**

IMO 9583794

FRED. OLSEN WINDCARRIER OPERATIONS AS

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION  
ON REQUEST

LIGHTING & DIMMING  
ON REQUEST

HELIDECK HEIGHT  
VARIABLE

D-VALUE  
22,20 m

MTOW  
12,6 t

HELIDECK POSITION ON VESSEL  
BOW

HIGHEST OBSTACLE ON VESSEL  
CRANE (MAX. 460ft ABOVE HLD))

REFUELLING FACILITY  
NO

GROUND POWER UNIT  
NO

LANDING NET  
NO

TD/PM LIGHTING  
YES

HELIPORT IDENT LIGHTING  
YES

STATUS LIGHT  
YES

FIRE FIGHTING FACILITIES


3 MONITORS  
MANUAL ACTIVATION

3 HYDRANTS  
3x FLEXIBLE HOSES

CO<sub>2</sub>  
2x 30 kg

DRY POWDER  
2x 50 kg

**VESSEL PROFILE VIEW (STARBOARD)**

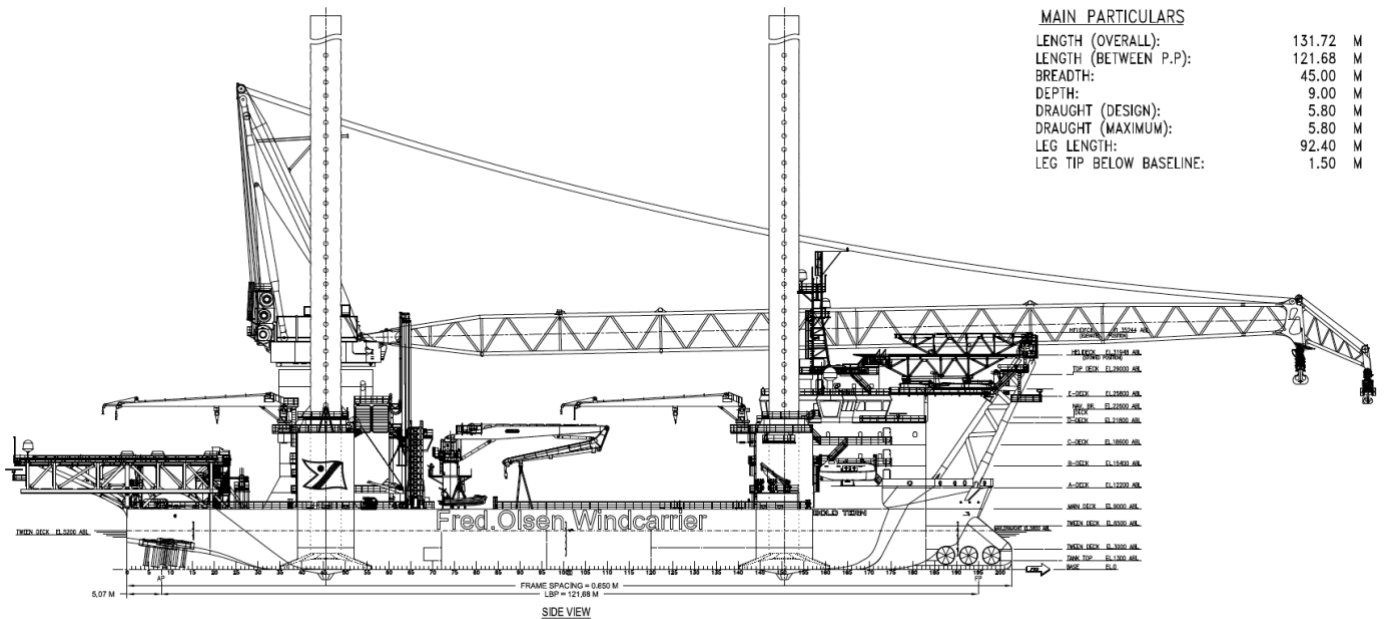

**MAIN PARTICULARS**

LENGTH (OVERALL):	131.72 M
LENGTH (BETWEEN P.P.):	121.68 M
BREADTH:	45.00 M
DEPTH:	9.00 M
DRAUGHT (DESIGN):	5.80 M
DRAUGHT (MAXIMUM):	5.80 M
LEG LENGTH:	92.40 M
LEG TIP BELOW BASELINE:	1.50 M

# BOLD TERN

HLD IDENTIFICATION  
**BOLD TERN**

VESSEL SIDE IDENTIFICATION  
**BOLD TERN**

IMO 9583794

FRED. OLSEN WINDCARRIER OPERATIONS AS

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION  
ON REQUEST

LIGHTING & DIMMING  
ON REQUEST

HELIDECK HEIGHT  
VARIABLE

D-VALUE  
22,20 m

MTOW  
12,6 t

HELIDECK POSITION ON VESSEL  
BOW

HIGHEST OBSTACLE ON VESSEL  
CRANE (MAX. 460ft ABOVE HLD))

REFUELLING FACILITY  
NO

GROUND POWER UNIT  
NO

LANDING NET  
NO

TD/PM LIGHTING  
YES

HELIPORT IDENT LIGHTING  
YES

STATUS LIGHT  
YES

FIRE FIGHTING FACILITIES

3 MONITORS  
MANUAL ACTIVATION

3 HYDRANTS  
3x FLEXIBLE HOSES

CO<sub>2</sub>  
2x 30 kg

DRY POWDER  
2x 50 kg

HELIDECK TOP VIEW

