

ARCADIS OST 1

HLD IDENTIFICATION
A01 OSS

ICAO IDENTIFIER
EDYC

OSS SIDE IDENTIFICATION
AO

FIXED NORMALLY UNATTENDED INSTALLATION
PARKWIND OST GMBH

HLD REFERENCE POINT		N 54° 49.05'		E 013° 40.63'	
LANGEN INFOMATION 132.650 MHz			MCC / HLO 154.831 MHz		
WEATHER INFOMATION 131.565 MHz 7x			LIGHTING & DIMMING 131.565 MHz 3x 100% 4x 10% (3%) 5x 30% (10%)		
HELIDECK HEIGHT 120 ft MSL	D-VALUE 22.20 m		MTOW 13 t		
APPROACH / DEPARTURE CORRIDOR					
NE: 063° / 243°			SW: 063° / 243°		
DECK HEADING 333°					
HIGHEST OBSTACLE ON INSTALLATION 39 ft ABOVE HLD (ANTENNA MAST)			HIGHEST OBSTACLE IN THE VICINITY 637 ft MSL (WTG)		
REFUELING FACILITY N/A	GROUND POWER UNIT YES	LANDING NET N/A	STATUS LIGHT N/A		
FIREFIGHTING FACILITIES					
DIFFS AUTO + MANUAL ACTIVATION	2X HYDRANT SEMI-RIDGID HOSES (30 m)	CO ₂ 2x 10 kg	DRY POWDER 2x 25 kg		



ARCADIS OST 1

HLD IDENTIFICATION

A01 OSS

ICAO IDENTIFIER

EDYC

OSS SIDE IDENTIFICATION

AO

 FIXED NORMALLY UNATTENDED INSTALLATION
 PARKWIND OST GMBH

HLD REFERENCE POINT			
N 54° 49.05'		E 013° 40.63'	
LANGEN INFOMATION 132.650 MHz		MCC / HLO 154.831 MHz	
WEATHER INFOMATION 131.565 MHz 7x		LIGHTING & DIMMING 131.565 MHz 3x 100% 4x 10% (3%) 5x 30% (10%)	
HELIDECK HEIGHT 120 ft MSL	D-VALUE 22.20 m		MTOW 13 t
APPROACH / DEPARTURE CORRIDOR			
NE: 063° / 243°		SW: 063° / 243°	
<i>DECK HEADING 333°</i>			
HIGHEST OBSTACLE ON INSTALLATION 39 ft ABOVE HLD (ANTENNA MAST)		HIGHEST OBSTACLE IN THE VICINITY 637 ft MSL (WTG)	
REFUELING FACILITY N/A	GROUND POWER UNIT YES	LANDING NET N/A	STATUS LIGHT N/A
FIREFIGHTING FACILITIES			
DIFFS AUTO + MANUAL ACTIVATION	2X HYDRANT SEMI-RIDGID HOSES (30 m)	CO₂ 2x 10 kg	DRY POWDER 2x 25 kg
NON – COMPLIANCES <ul style="list-style-type: none"> • NIL 		LIMITATIONS <ul style="list-style-type: none"> • NIL 	

REMARKS

- CONTACT MCC / HLO PRIOR TO ENTERING OWF AND FOR FURTHER CLEARANCES
- BE AWARE OF WTG IN CLOSE PROXIMITY TO HELIDECK
- FLIGHT OPERATIONS ONLY TO BE CONDUCTED WITH CRANE RESTING CLEAR OF OBSTACLE PROTECTED SURFACES
- OSS WX DATA FOR INFORMATION ONLY

ARCADIS OST 1

HLD IDENTIFICATION
A01 OSS


ICAO IDENTIFIER
EDYC

OSS SIDE IDENTIFICATION
AO

FIXED NORMALLY UNATTENDED INSTALLATION
PARKWIND OST GMBH

HLD REFERENCE POINT	
N 54° 49.05'	E 013° 40.63'
LANGEN INFOMATION 132.650 MHz	MCC / HLO 154.831 MHz
WEATHER INFOMATION 131.565 MHz 7x	LIGHTING & DIMMING 131.565 MHz 3x 100% 4x 10% (3%) 5x 30% (10%)
HELIDECK HEIGHT 120 ft MSL	D-VALUE 22.20 m
MTOW 13 t	
APPROACH / DEPARTURE CORRIDOR	
NE: 063° / 243°	SW: 063° / 243°
<i>DECK HEADING 333°</i>	
HIGHEST OBSTACLE ON INSTALLATION 39 ft ABOVE HLD (ANTENNA MAST)	HIGHEST OBSTACLE IN THE VICINITY 637 ft MSL (WTG)
REFUELING FACILITY N/A	GROUND POWER UNIT YES
LANDING NET N/A	STATUS LIGHT N/A

FIREFIGHTING FACILITIES			
DIFFS AUTO + MANUAL ACTIVATION	2X HYDRANT SEMI-RIDGID HOSES (30 m)	CO₂ 2x 10 kg	DRY POWDER 2x 25 kg

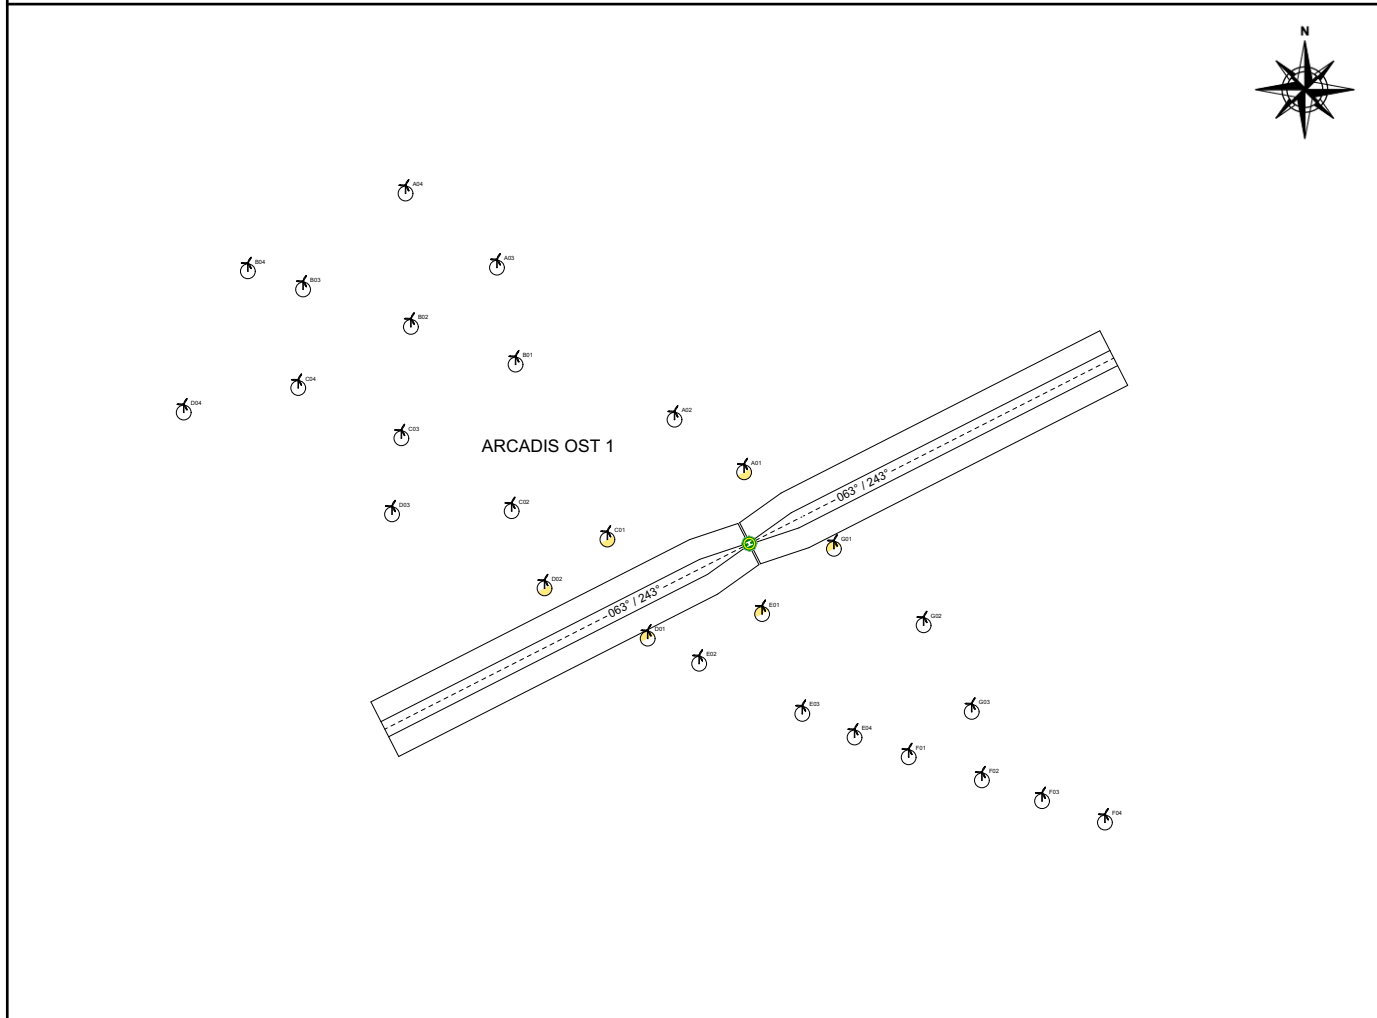

ARCADIS OST 1

HLD IDENTIFICATION
A01 OSS


ICAO IDENTIFIER
EDYC

OSS SIDE IDENTIFICATION
AO

FIXED NORMALLY UNATTENDED INSTALLATION
PARKWIND OST GMBH

HLD REFERENCE POINT		N 54° 49.05'		E 013° 40.63'	
LANGEN INFOMATION 132.650 MHz			MCC / HLO 154.831 MHz		
WEATHER INFOMATION 131.565 MHz 7x			LIGHTING & DIMMING 131.565 MHz 3x 100% 4x 10% (3%) 5x 30% (10%)		
HELIDECK HEIGHT 120 ft MSL	D-VALUE 22.20 m		MTOW 13 t		
APPROACH / DEPARTURE CORRIDOR					
NE: 063° / 243°		DECK HEADING 333°		SW: 063° / 243°	
HIGHEST OBSTACLE ON INSTALLATION 39 ft ABOVE HLD (ANTENNA MAST)			HIGHEST OBSTACLE IN THE VICINITY 637 ft MSL (WTG)		
REFUELING FACILITY N/A	GROUND POWER UNIT YES	LANDING NET N/A	STATUS LIGHT N/A		
FIREFIGHTING FACILITIES					
DIFFS AUTO + MANUAL ACTIVATION	2X HYDRANT SEMI-RIDGID HOSES (30 m)	CO ₂ 2x 10 kg	DRY POWDER 2x 25 kg		

INSTALLATION PROFILE VIEW (EAST)

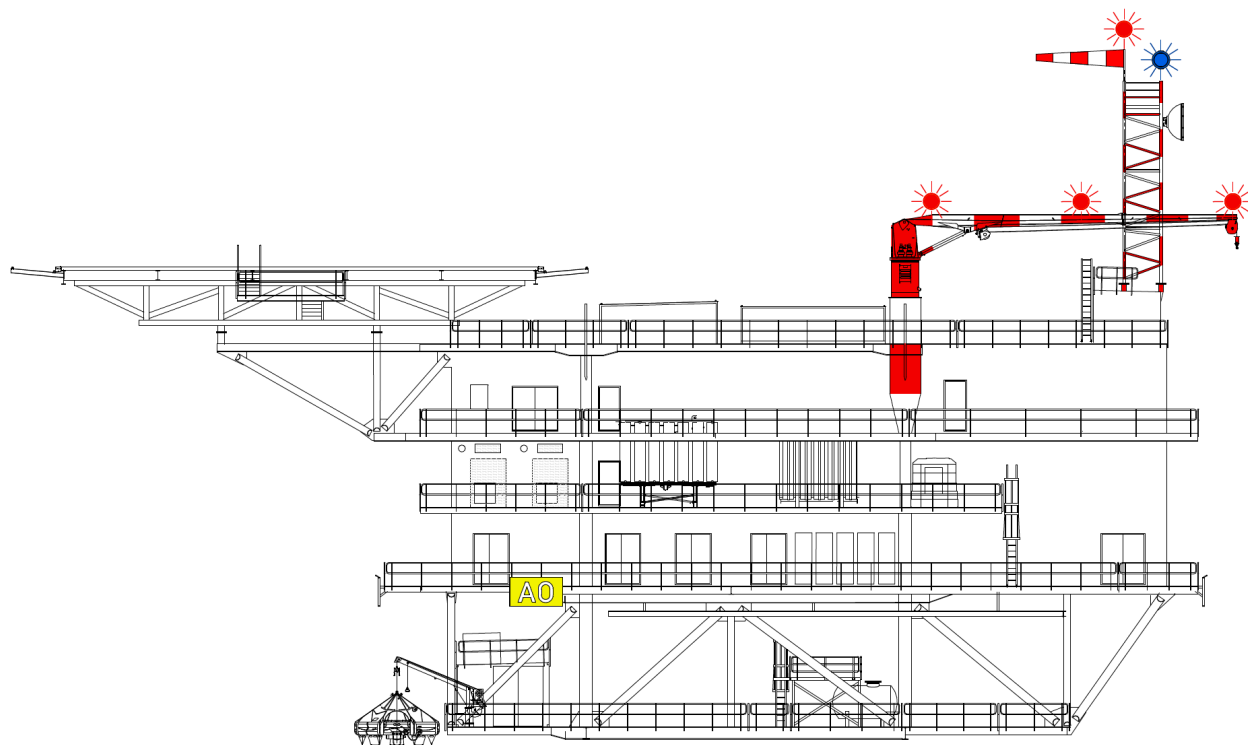

ARCADIS OST 1

HLD IDENTIFICATION
A01 OSS


ICAO IDENTIFIER
EDYC

OSS SIDE IDENTIFICATION
AO

FIXED NORMALLY UNATTENDED INSTALLATION
PARKWIND OST GMBH

HLD REFERENCE POINT			
N 54° 49.05'		E 013° 40.63'	
LANGEN INFOMATION 132.650 MHz		MCC / HLO 154.831 MHz	
WEATHER INFOMATION 131.565 MHz 7x		LIGHTING & DIMMING 131.565 MHz 3x 100% 4x 10% (3%) 5x 30% (10%)	
HELIDECK HEIGHT 120 ft MSL	D-VALUE 22.20 m	MTOW 13 t	
APPROACH / DEPARTURE CORRIDOR			
NE: 063° / 243°		SW: 063° / 243°	
<i>DECK HEADING 333°</i>			
HIGHEST OBSTACLE ON INSTALLATION 39 ft ABOVE HLD (ANTENNA MAST)		HIGHEST OBSTACLE IN THE VICINITY 637 ft MSL (WTG)	
REFUELING FACILITY N/A	GROUND POWER UNIT YES	LANDING NET N/A	STATUS LIGHT N/A
FIREFIGHTING FACILITIES			
DIFFS AUTO + MANUAL ACTIVATION	2X HYDRANT SEMI-RIDGID HOSES (30 m)	CO₂ 2x 10 kg	DRY POWDER 2x 25 kg

INSTALLATION TOP VIEW

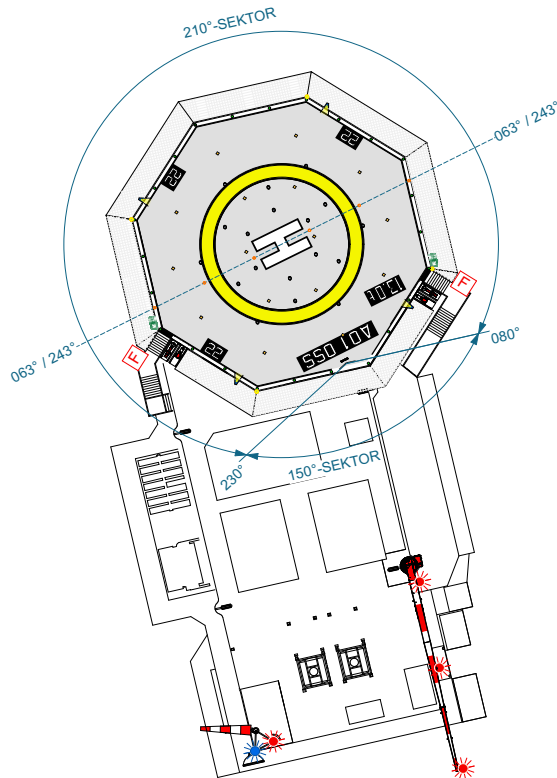


A01 OSS DEPARTURE ARC NE

EXIT POINT ARC NE
N 54° 50,28' E 013° 44,63'

DEPARTURE PROCEDURE

- DEPART ON TRACK 063°
- OBSTACLE-FREE WHEN WITHIN DEPARTURE CORRIDOR
- ABOVE WTG HEIGHT WHEN PASSING 637 ft MSL
- CORRIDOR DESIGNED TO REACH 200 FT ABOVE WTG HEIGHT AT EXIT POINT ARCNE (4.5% CLIMB RATE)

DEPARTURE TOP VIEW

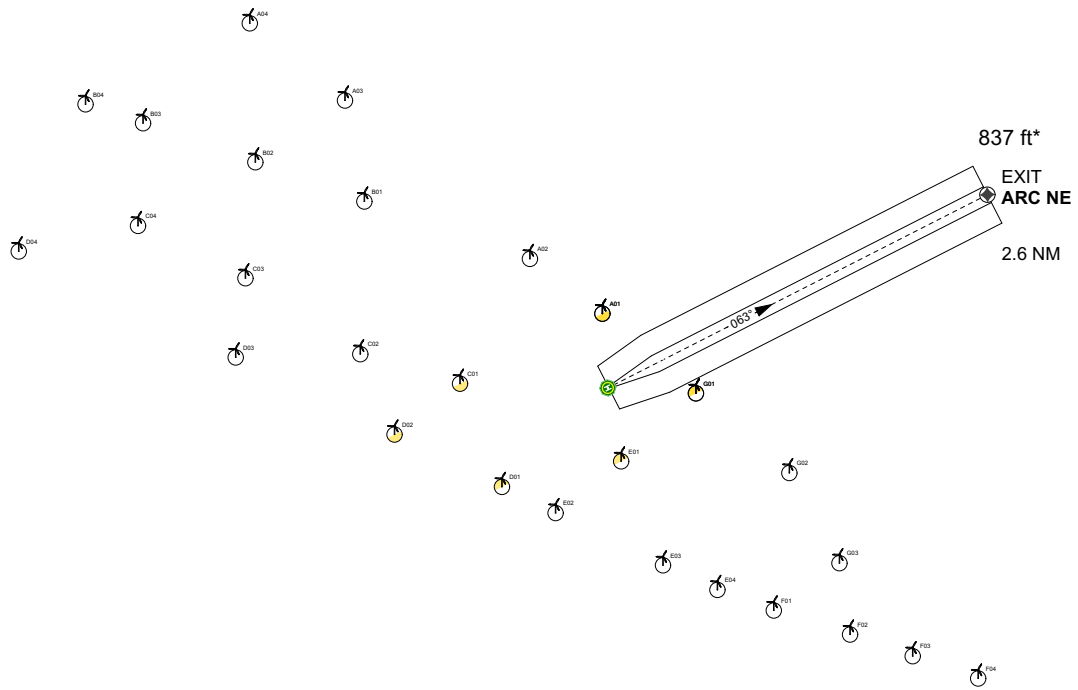

*200 ft above WTG


A01 OSS DEPARTURE ARC SW

EXIT POINT ARC SW
N 54° 47,81' E 013° 36,63'

DEPARTURE PROCEDURE

- DEPART ON TRACK 243°
- OBSTACLE-FREE WHEN WITHIN DEPARTURE CORRIDOR
- ABOVE WTG HEIGHT WHEN PASSING 637 ft MSL
- CORRIDOR DESIGNED TO REACH 200 FT ABOVE WTG HEIGHT AT EXIT POINT ARCNE (4.5% CLIMB RATE)

DEPARTURE TOP VIEW

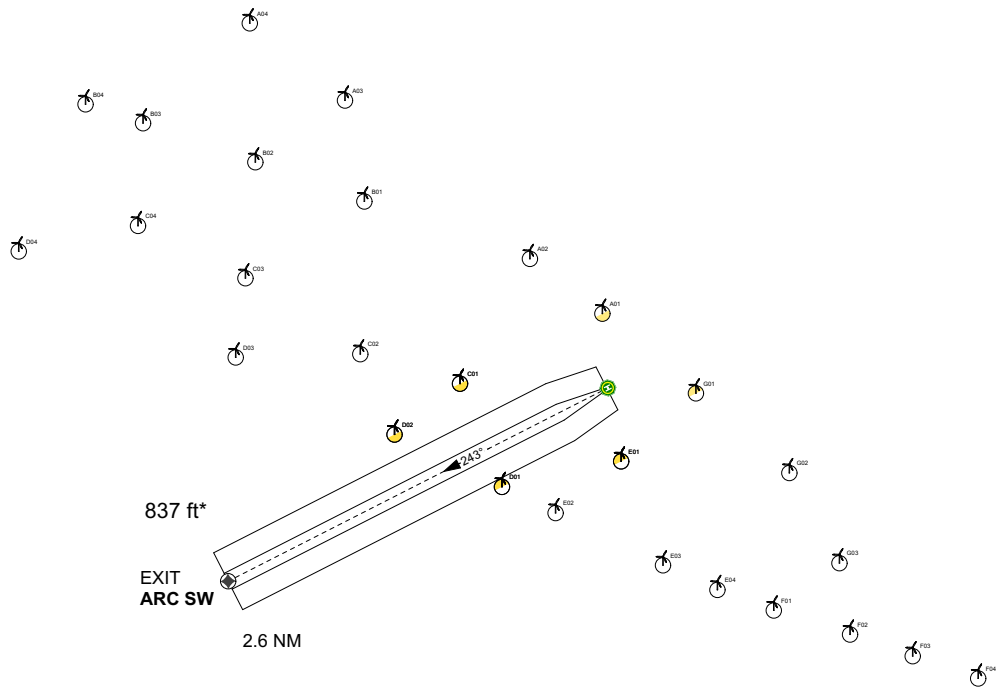

*200 ft above WTG